



SLIM

48V Magnetic Track



ONLY 6MM HEIGHT

6mm




SLIM 48V SAFE VOLTAGE MODULAR MAGNETIC TRACK LIGHT SYSTEM

Offers a range of rail slot accessories to accommodate a 48V rail input in any space or furniture arrangement. When paired with magnetic light units, a variety of lighting options can be achieved effortlessly.

A more structured method for achieving lighting effects in a space is now possible. Different types of lighting, such as key lighting, wall washing lighting, area task lighting, and even indirect lighting, can all be easily achieved.

SLIM 48V Magnetic Track

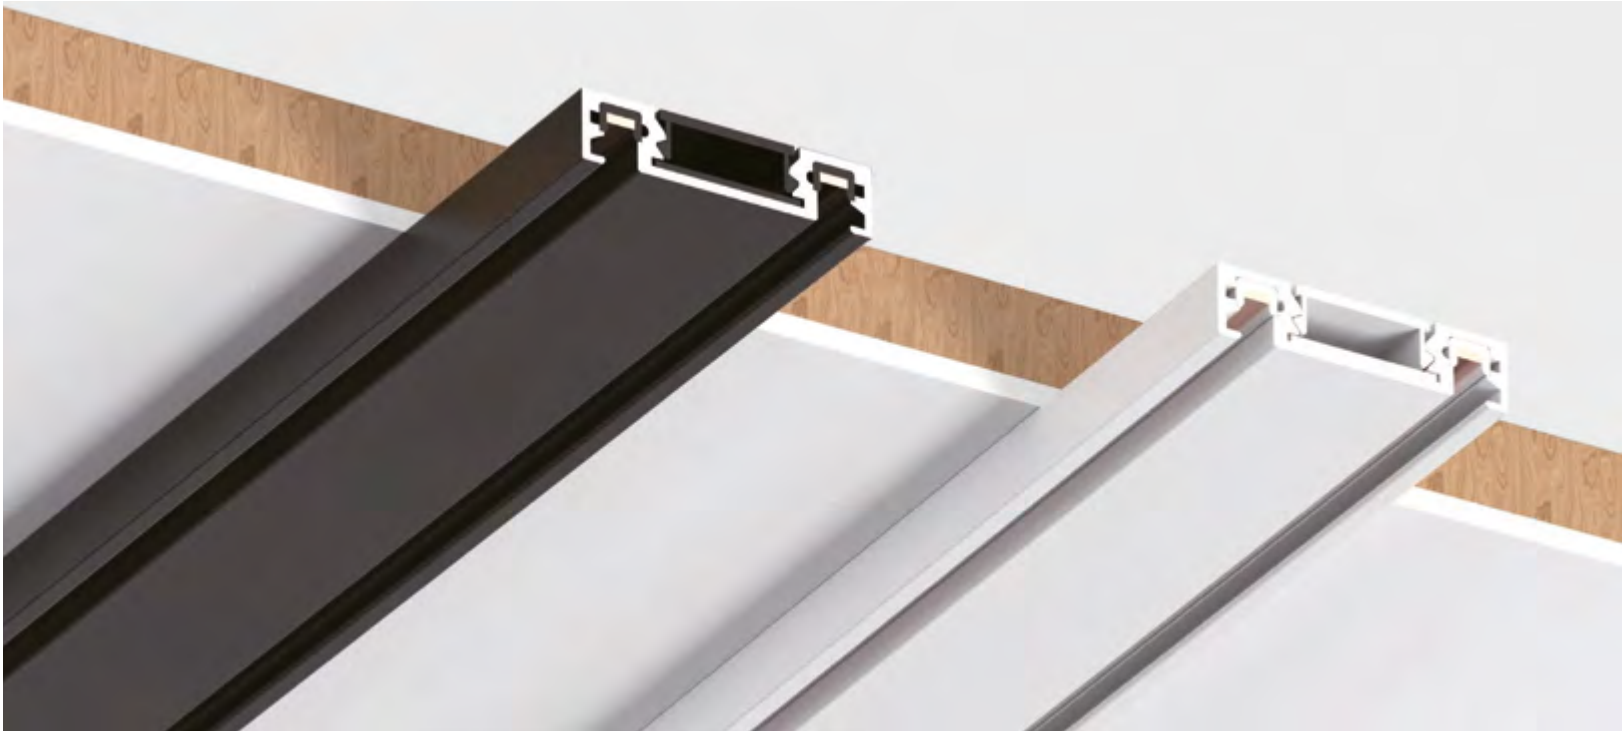

Flexi Joint

Product Code:	Colour:	Description:	Volt:	Dimension:
2-U014038	○ White	POWER SUPPLY	48V	230x26x24 (LxWx H) mm



2-U014007	● Black	POWER SUPPLY	48V	230x26x24 (LxWx H) mm
-----------	---------	--------------	-----	--------------------------

Product Code:	Colour:	Description:	Volt:	Dimension:
	○ White	FLEXIBLE STRAIGHT JOINT SHORT	48V	







	● Black	FLEXIBLE STRAIGHT JOINT LONG	48V	
--	---------	------------------------------------	-----	--

Product Code:	Colour:	Description:	Volt:	Dimension:
2-U014014	○ White	FLEXIBLE STRAIGHT JOINT LONG	48V	

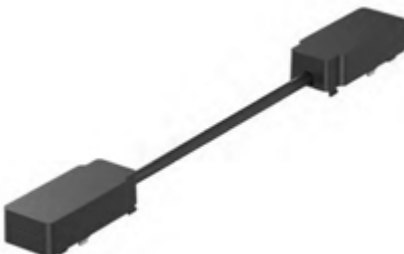2-U014021	● Black	FLEXIBLE STRAIGHT JOINT LONG	48V	
-----------	---------	------------------------------------	-----	--





Track Joint

 	Product Code:	Colour:	Description:	Volt:	Dimension:	Track Length
	2-U013970	○ White	90° JOINT	48V	26x6 (WxD)mm	1
 	Product Code:	Colour:	Description:	Volt:	Dimension:	Track Length
	2-U013932	○ White	TRACK STRAIGHT JOINT	48V	26x6 (WxD)mm	1
 	Product Code:	Colour:	Description:	Volt:	Dimension:	Track Length
	2-U013956	○ White	ALL PURPOSE JOINT	48V	26x6 (WxD)mm	1
	2-U013949	● Black	TRACK STRAIGHT JOINT	48V	26x6 (WxD)mm	1
	2-U013901	● Black	ALL PURPOSE JOINT	48V	26x6 (WxD)mm	1

Power Supply



	Product Code:	Colour:	Description:	Volt:	Dimension:	Current Power
	2-U014038	○ White	TRACK POWER SUPPLY 100W	48V	210x26x24 (LxWx H) mm	100W
	2-U014045	● Black	TRACK POWER SUPPLY 100W	48V	210x26x24 (LxWx H) mm	100W
	2-U014052	○ White	TRACK POWER SUPPLY 200W	48V	230x26x24 (LxWx H) mm	200W
	2-U014069	● Black	TRACK POWER SUPPLY 200W	48V	230x26x24 (LxWx H) mm	200W
	2-U014038	○ White	TRACK POWER SUPPLY 100W	48V	230x26x24 (LxWx H) mm	
	2-U014083	● Black	CABLE STORAGE BOX	48V	230x26x24 (LxWx H) mm	







SLIM

Magnetic Grille Light



Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014113	○ White	6W	500lm	3000K	24°	Slim 48V Magnetic Grille Light	48V	>90	338x26x24 (WxHxD)mm
2-U014120	● Black	6W	500lm	3000K	24°	Slim 48V Magnetic Grille Light	48V	>90	338x26x24 (WxHxD)mm

Highlights







SLIM

Magnetic Grille Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014090	○ White	10W	850lm	3000K	24°	Slim 48V Magnetic Grille Light	48V	>90	230x26x24 (WxHxD)mm
2-U014106	● Black	10W	850lm	3000K	24°	Slim 48V Magnetic Grille Light	48V	>90	230x26x24 (WxHxD)mm

Highlights





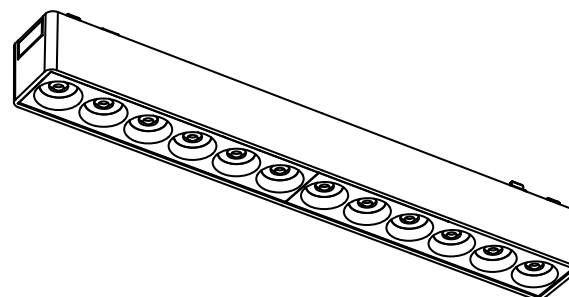





SLIM

Magnetic Grille Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014113	○ White	18W	1275lm	3000K	24°	Slim 48V Magnetic Grille Light	48V	>90	338x26x24 (WxHxD)mm
2-U014120	● Black	18W	1275lm	3000K	24°	Slim 48V Magnetic Grille Light	48V	>90	338x26x24 (WxHxD)mm

Highlights

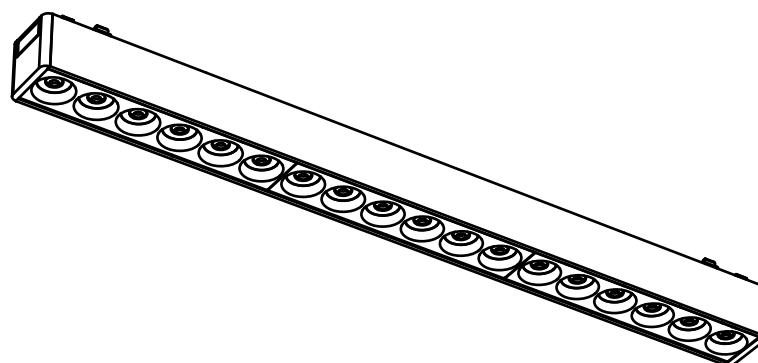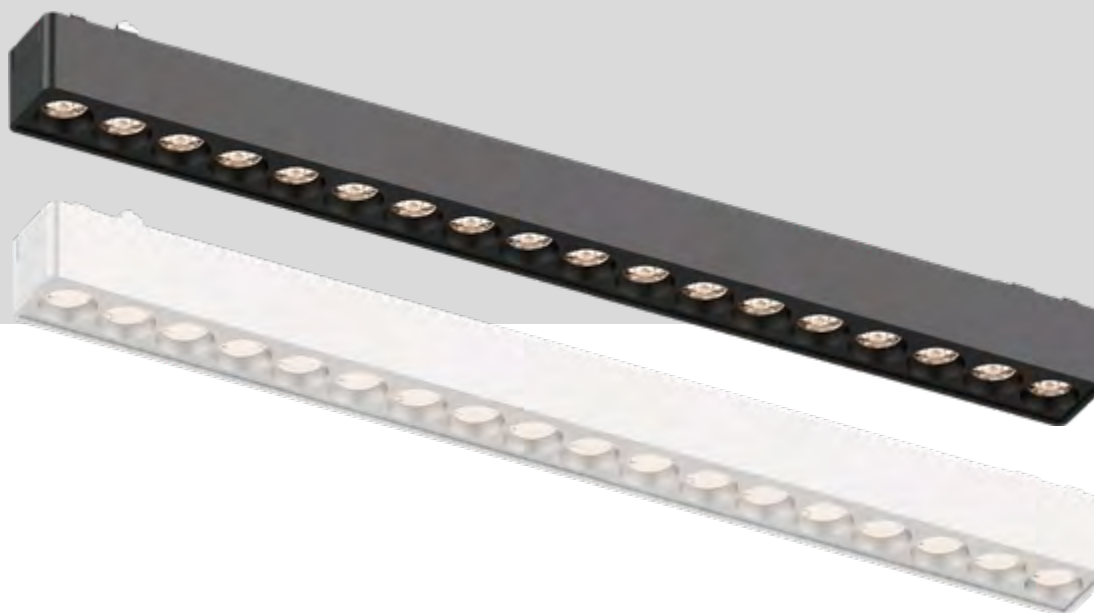






SLIM

Magnetic Flood Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014137	○ White	10W	850lm	3000K	24°	Slim 48V Magnetic Flood Light	48V	>90	230x26x24 (WxHxD)mm
2-U014144	● Black	10W	850lm	3000K	24°	Slim 48V Magnetic Flood Light	48V	>90	230x26x24 (WxHxD)mm

Highlights




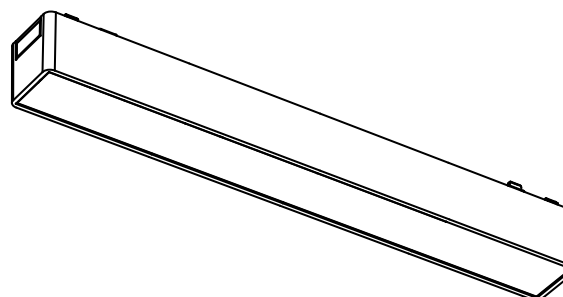
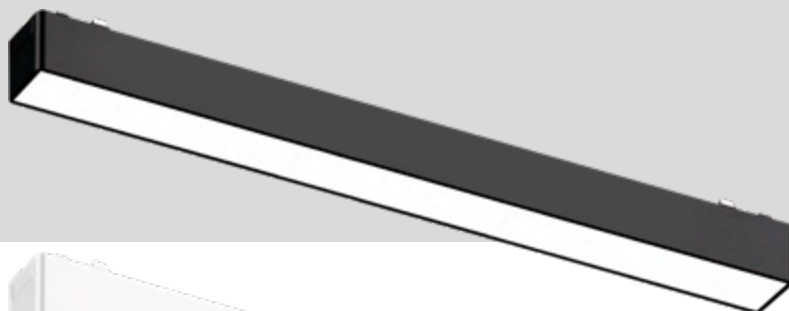





S | I M

Magnetic Flood Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014717	○ White	30W	2550lm	3000K	24°	Slim 48V Magnetic Flood Light	48V	>90	915x26x24 (WxHxD)mm
2-U014724	● Black	30W	2550lm	3000K	24°	Slim 48V Magnetic Flood Light	48V	>90	915x26x24 (WxHxD)mm

Highlights

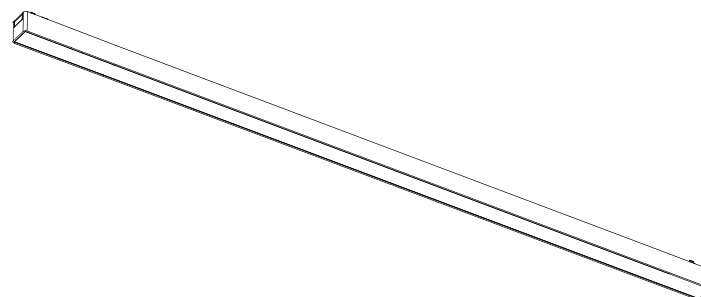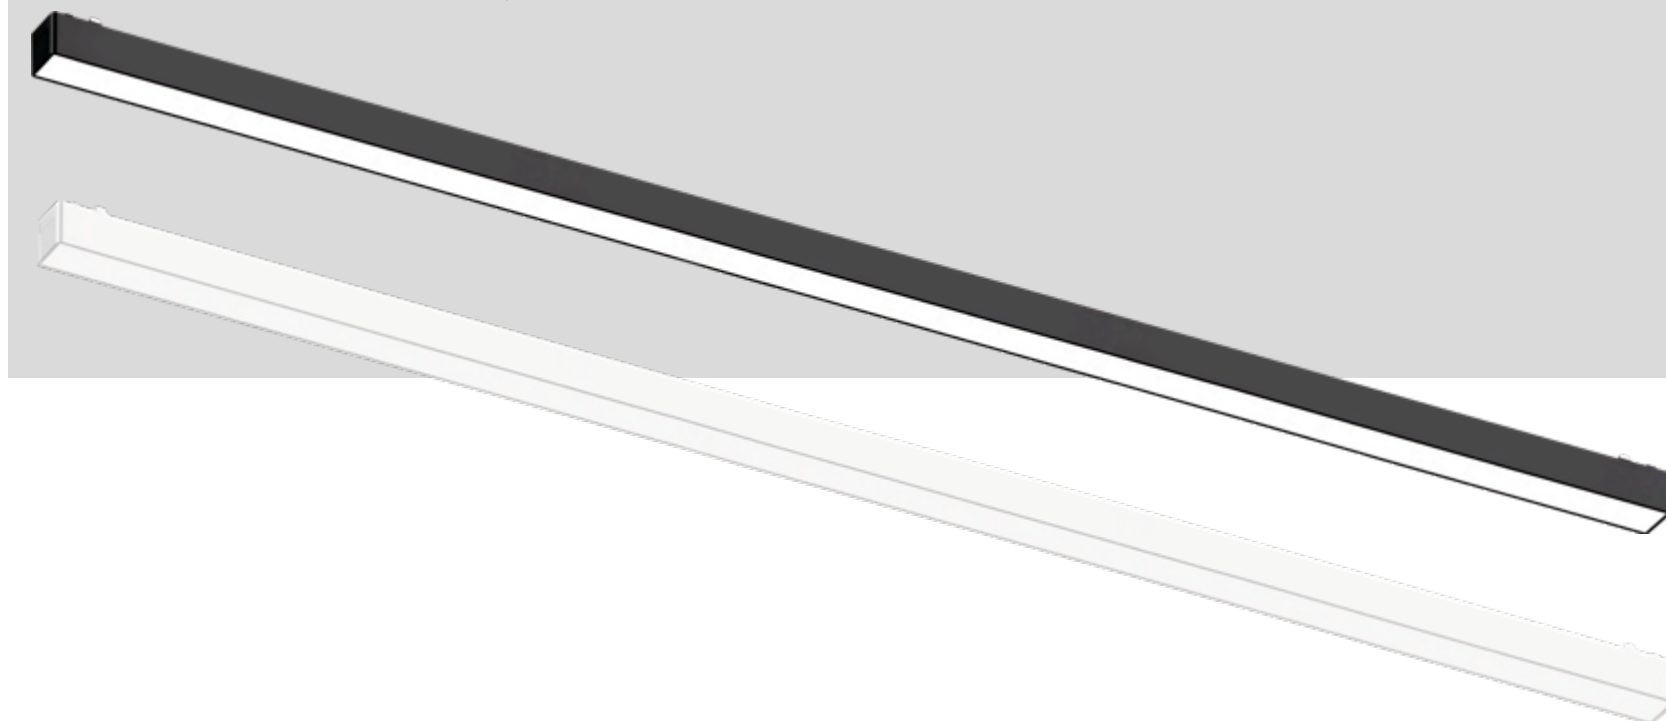






S | I | M


Magnetic Spot Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014151	○ White	6W	450lm	3000K	150°	Slim 48V Magnetic Spot Light	DC48V	>90	80x75 (DxH)mm
2-U014168	● Black	6W	450lm	3000K	150°	Slim 48V Magnetic Spot Light	DC48V	>90	80x75 (DxH)mm

Highlights

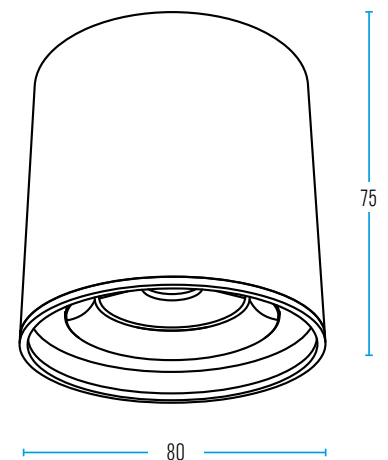










SLIM

Magnetic Double Spot Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014199	○ White	2x9W	1550lm	3000K	24°	Slim 48V Magnetic Double Track Spot Light	DC48V	>90	55x138 (DxH)mm
2-U014205	● Black	2x9W	1550lm	3000K	24°	Slim 48V Magnetic Double Track Spot Light	DC48V	>90	55x138 (DxH)mm

Highlights

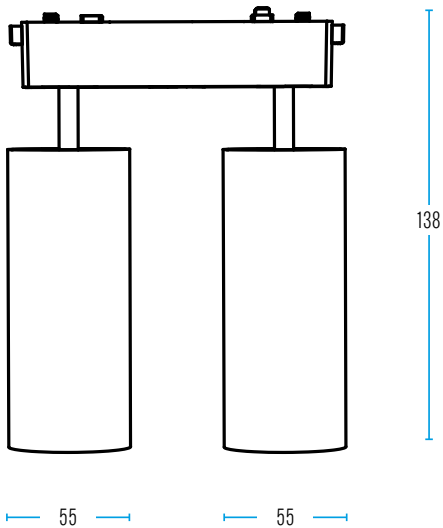
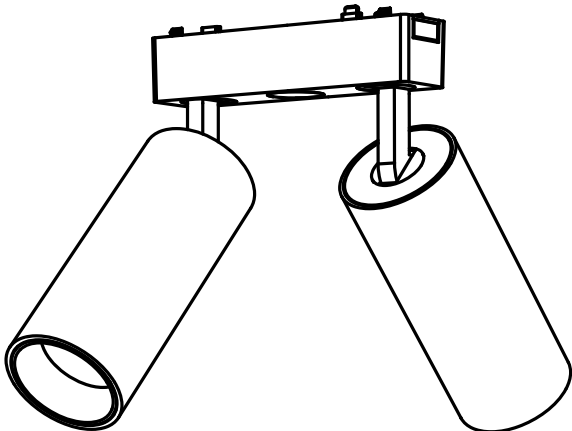





SLIM

Magnetic Spot Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014175	○ White	9W	765lm	3000K	24°	Slim 48V Magnetic Track Spot Light	DC48V	>90	44x112 (DxH)mm
2-U014182	● Black	9W	765lm	3000K	24°	Slim 48V Magnetic Track Spot Light	DC48V	>90	44x112 (DxH)mm

Highlights

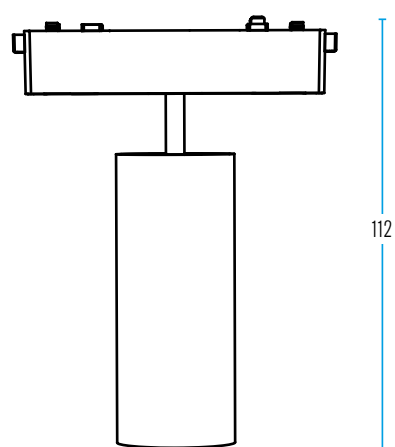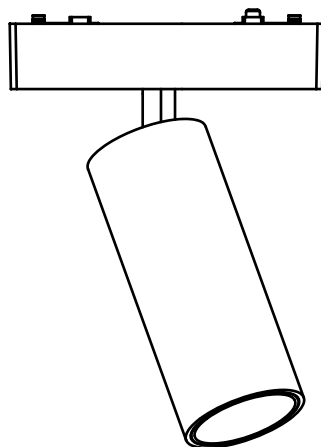






44

S | I | M

Magnetic Spot Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014212	○ White	9W	675lm	3000K	180°	Slim 48V Magnetic Track Spot Light	DC48V	>90	85x40 (DxH)mm
2-U014229	● Black	9W	675lm	3000K	180°	Slim 48V Magnetic Track Spot Light	DC48V	>90	85x40 (DxH)mm

Highlights

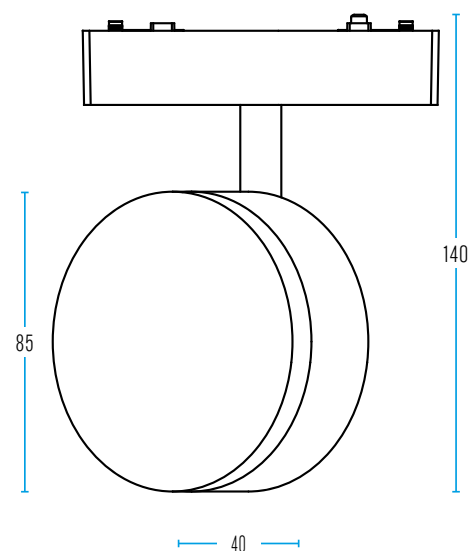




SLIM


Magnetic Suspension Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014250	○ White	6W	570lm	3000K	180°	Slim 48V Magnetic Suspension Light	48V	>90	100x100 (DxH)mm
2-U014267	● Black	6W	570lm	3000K	180°	Slim 48V Magnetic Suspension Light	48V	>90	100x100 (DxH)mm

Highlights

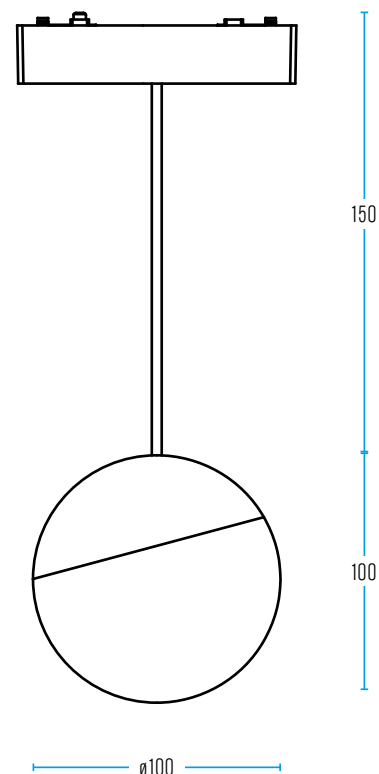






SLIM



Magnetic Suspension Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014235	○ White	6W	480lm	3000K	180°	Slim 48V Magnetic Suspension Light	DC48V	>90	30x100 (DxH)mm
2-U014243	● Black	6W	480lm	3000K	180°	Slim 48V Magnetic Suspension Light	DC48V	>90	30x100 (DxH)mm

Highlights

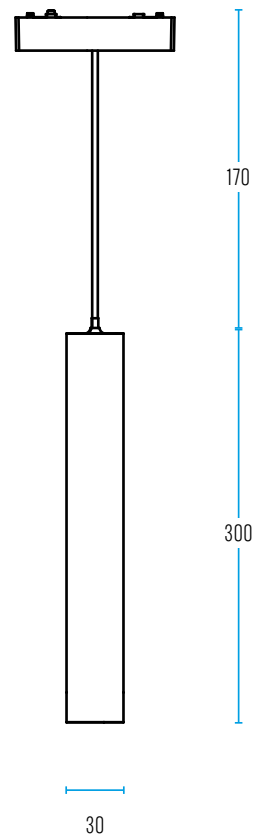






SLIM


Magnetic Soft Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U014984	● Black	5W	425lm	3000K	360°	Slim 48V Magnetic Soft Light	DC48V	>90	

Highlights

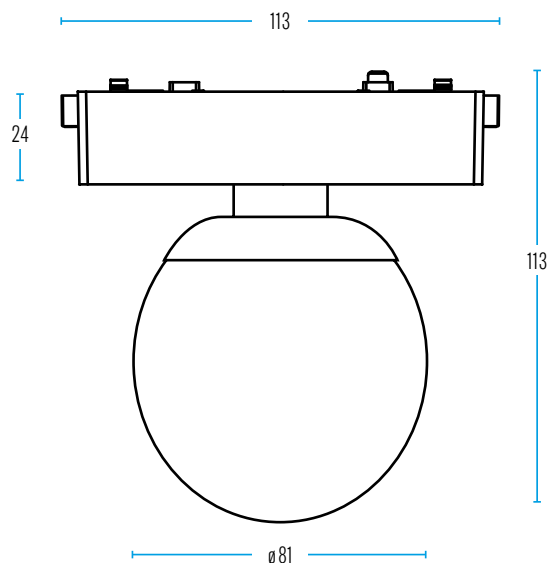









SLIM



Magnetic Indirect Light


Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	Dimension:
2-U015011	○ White	5W	425lm	3000K	180°	Slim 48V Magnetic Indirect Light	DC48V	>90	
xx	● Black	5W	425lm	3000K	360°	Slim 48V Magnetic Indirect Light	DC48V	>90	

Highlights

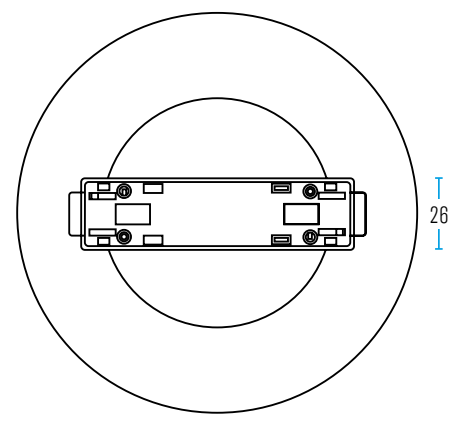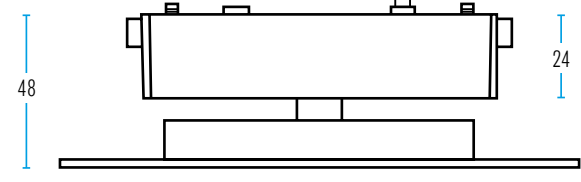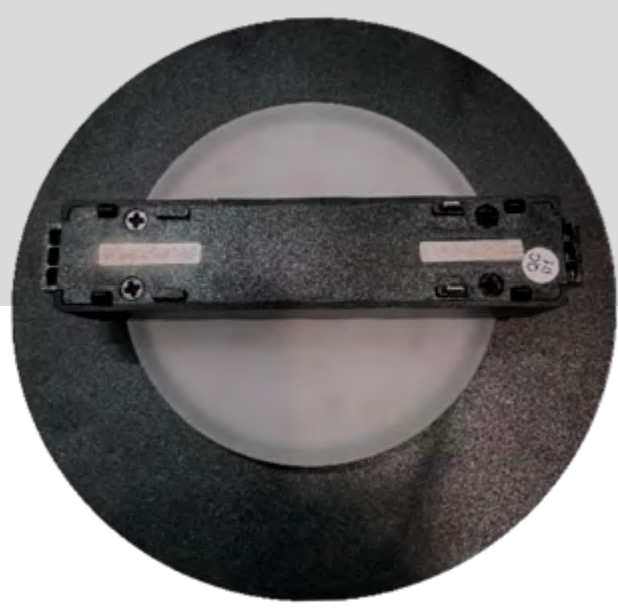

113


ø185

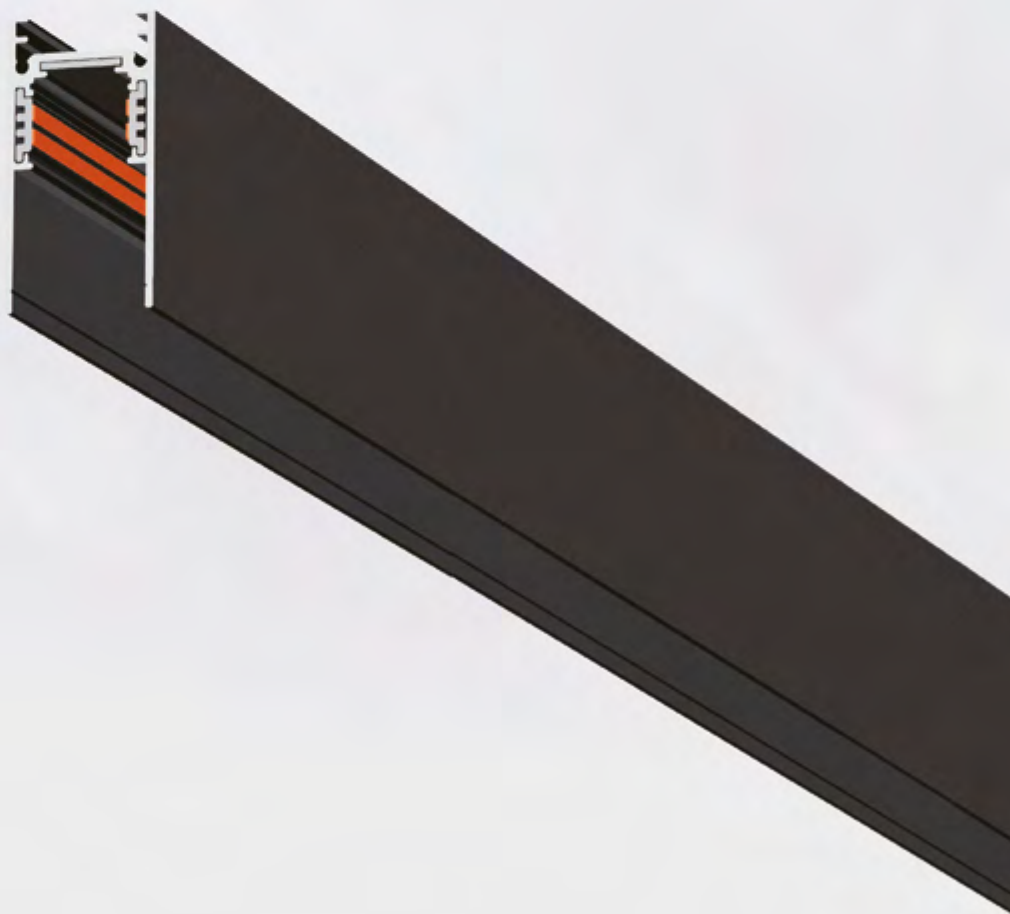

STANDARD

48V Magnetic Track



SURFACE MOUNTED

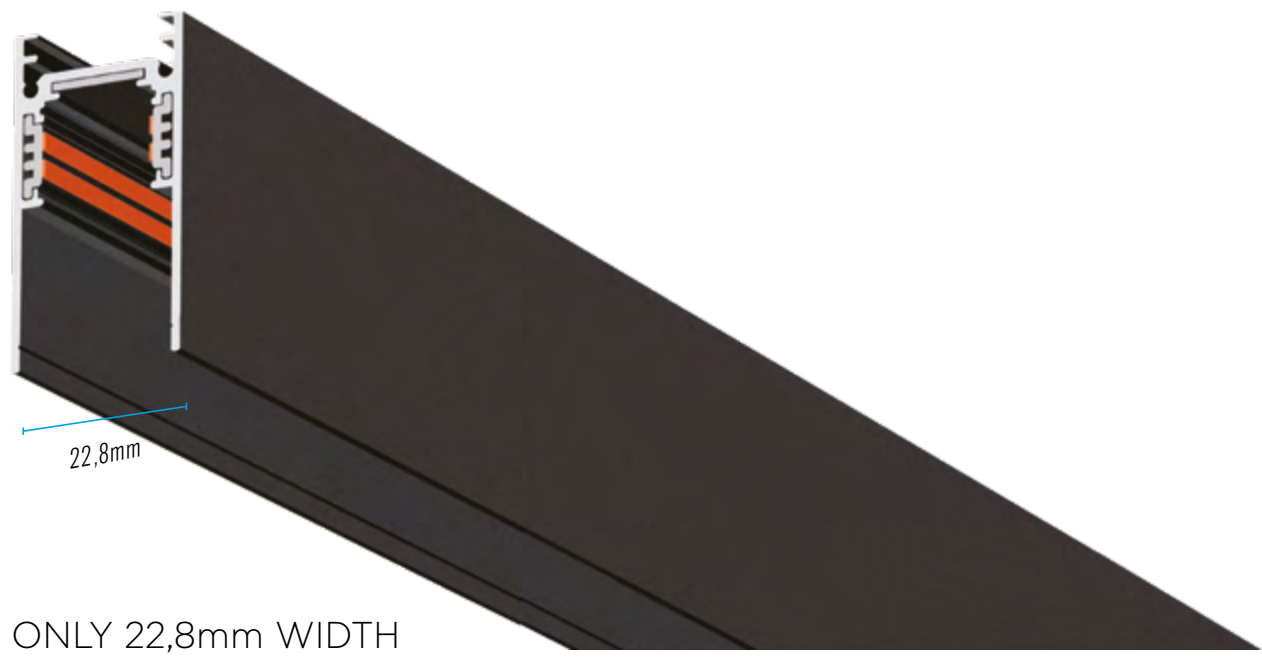

ONLY 22,8mm WIDTH

Product Code:	Colour:	Description:	Volt:	Profile thickness	Round Copper	Track length:
2-U014274	○ White	STANDARD 48V MAGNETIC TRACK SURFACE MOUNTED (inc. end caps & dust proof plastic lead)	48V	1.5mm	2.0 mm (Diameter)	1,00m
2-U014281	● Black					

Product Code:	Colour:	Description:	Volt:	Profile thickness	Round Copper	Track length:
2-U014298	○ White	STANDARD 48V MAGNETIC TRACK SURFACE MOUNTED (inc. end caps & dust proof plastic lead)	48V	1.5mm	2.0 mm (Diameter)	2,00m
2-U014304	● Black					

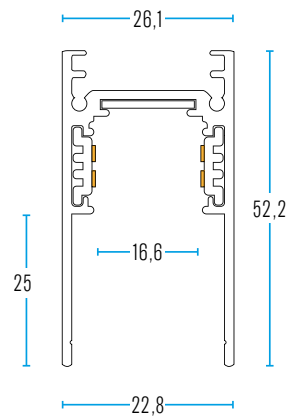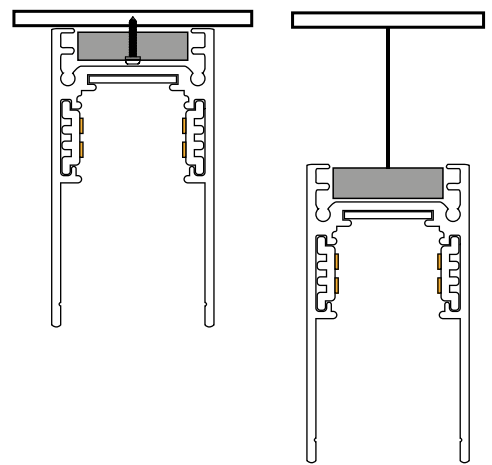

STANDARD



Track Joint

Product Code:	Colour:	Description:	Volt:	Dimension:	Track Length
2-U015172	○ White	HORIZONTAL 90° JOINT	48V		1
2-U015165	● Black	HORIZONTAL 90° JOINT	48V		1
2-U015196	○ White	VERTICAL 90° JOINT	48V		1
2-U015189	● Black	VERTICAL 90° JOINT	48V		1
2-U014434	○ White	MAGNETIC TRACK CONNECTION PLATE	48V		1
2-U014441	● Black	MAGNETIC TRACK CONNECTION PLATE	48V		1



Track Suspension

Product Code:	Colour:	Description:	Volt:
2-U014410	○ White	SLIM MAGNETIC TRACK SUSPENSION	48V
2-U014427	● Black	SLIM MAGNETIC TRACK SUSPENSION	48V

Flexi Joint



Product Code:	Colour:	Description:	Volt:	Track Length
2-U014359	○ White	STRAIGHT JOINT	48V	1
2-U014366	● Black	STRAIGHT JOINT	48V	1



Product Code:	Colour:	Description:	Volt:
2-U014397	○ White	MAGNETIC TRACK FLEXIBLE JOINT	48V
2-U014403	● Black	MAGNETIC TRACK FLEXIBLE JOINT	48V



Product Code:	Colour:	Description:	Volt:
2-U014373	○ White	MAGNETIC TRACK POWER SUPPLY COMPONENT	48V
2-U014380	● Black	MAGNETIC TRACK POWER SUPPLY COMPONENT	48V


Power Supply



Product Code:	Colour:	Description:	Volt:	Current Power
2-U014458	○ White	MAGNETIC TRACK POWER SUPPLY	48V	100W
2-U014465	● Black	MAGNETIC TRACK POWER SUPPLY	48V	100W



Product Code:	Colour:	Description:	Volt:	Current Power
2-U014472	○ White	MAGNETIC TRACK POWER SUPPLY	48V	200W
2-U014489	● Black	MAGNETIC TRACK POWER SUPPLY	48V	200W

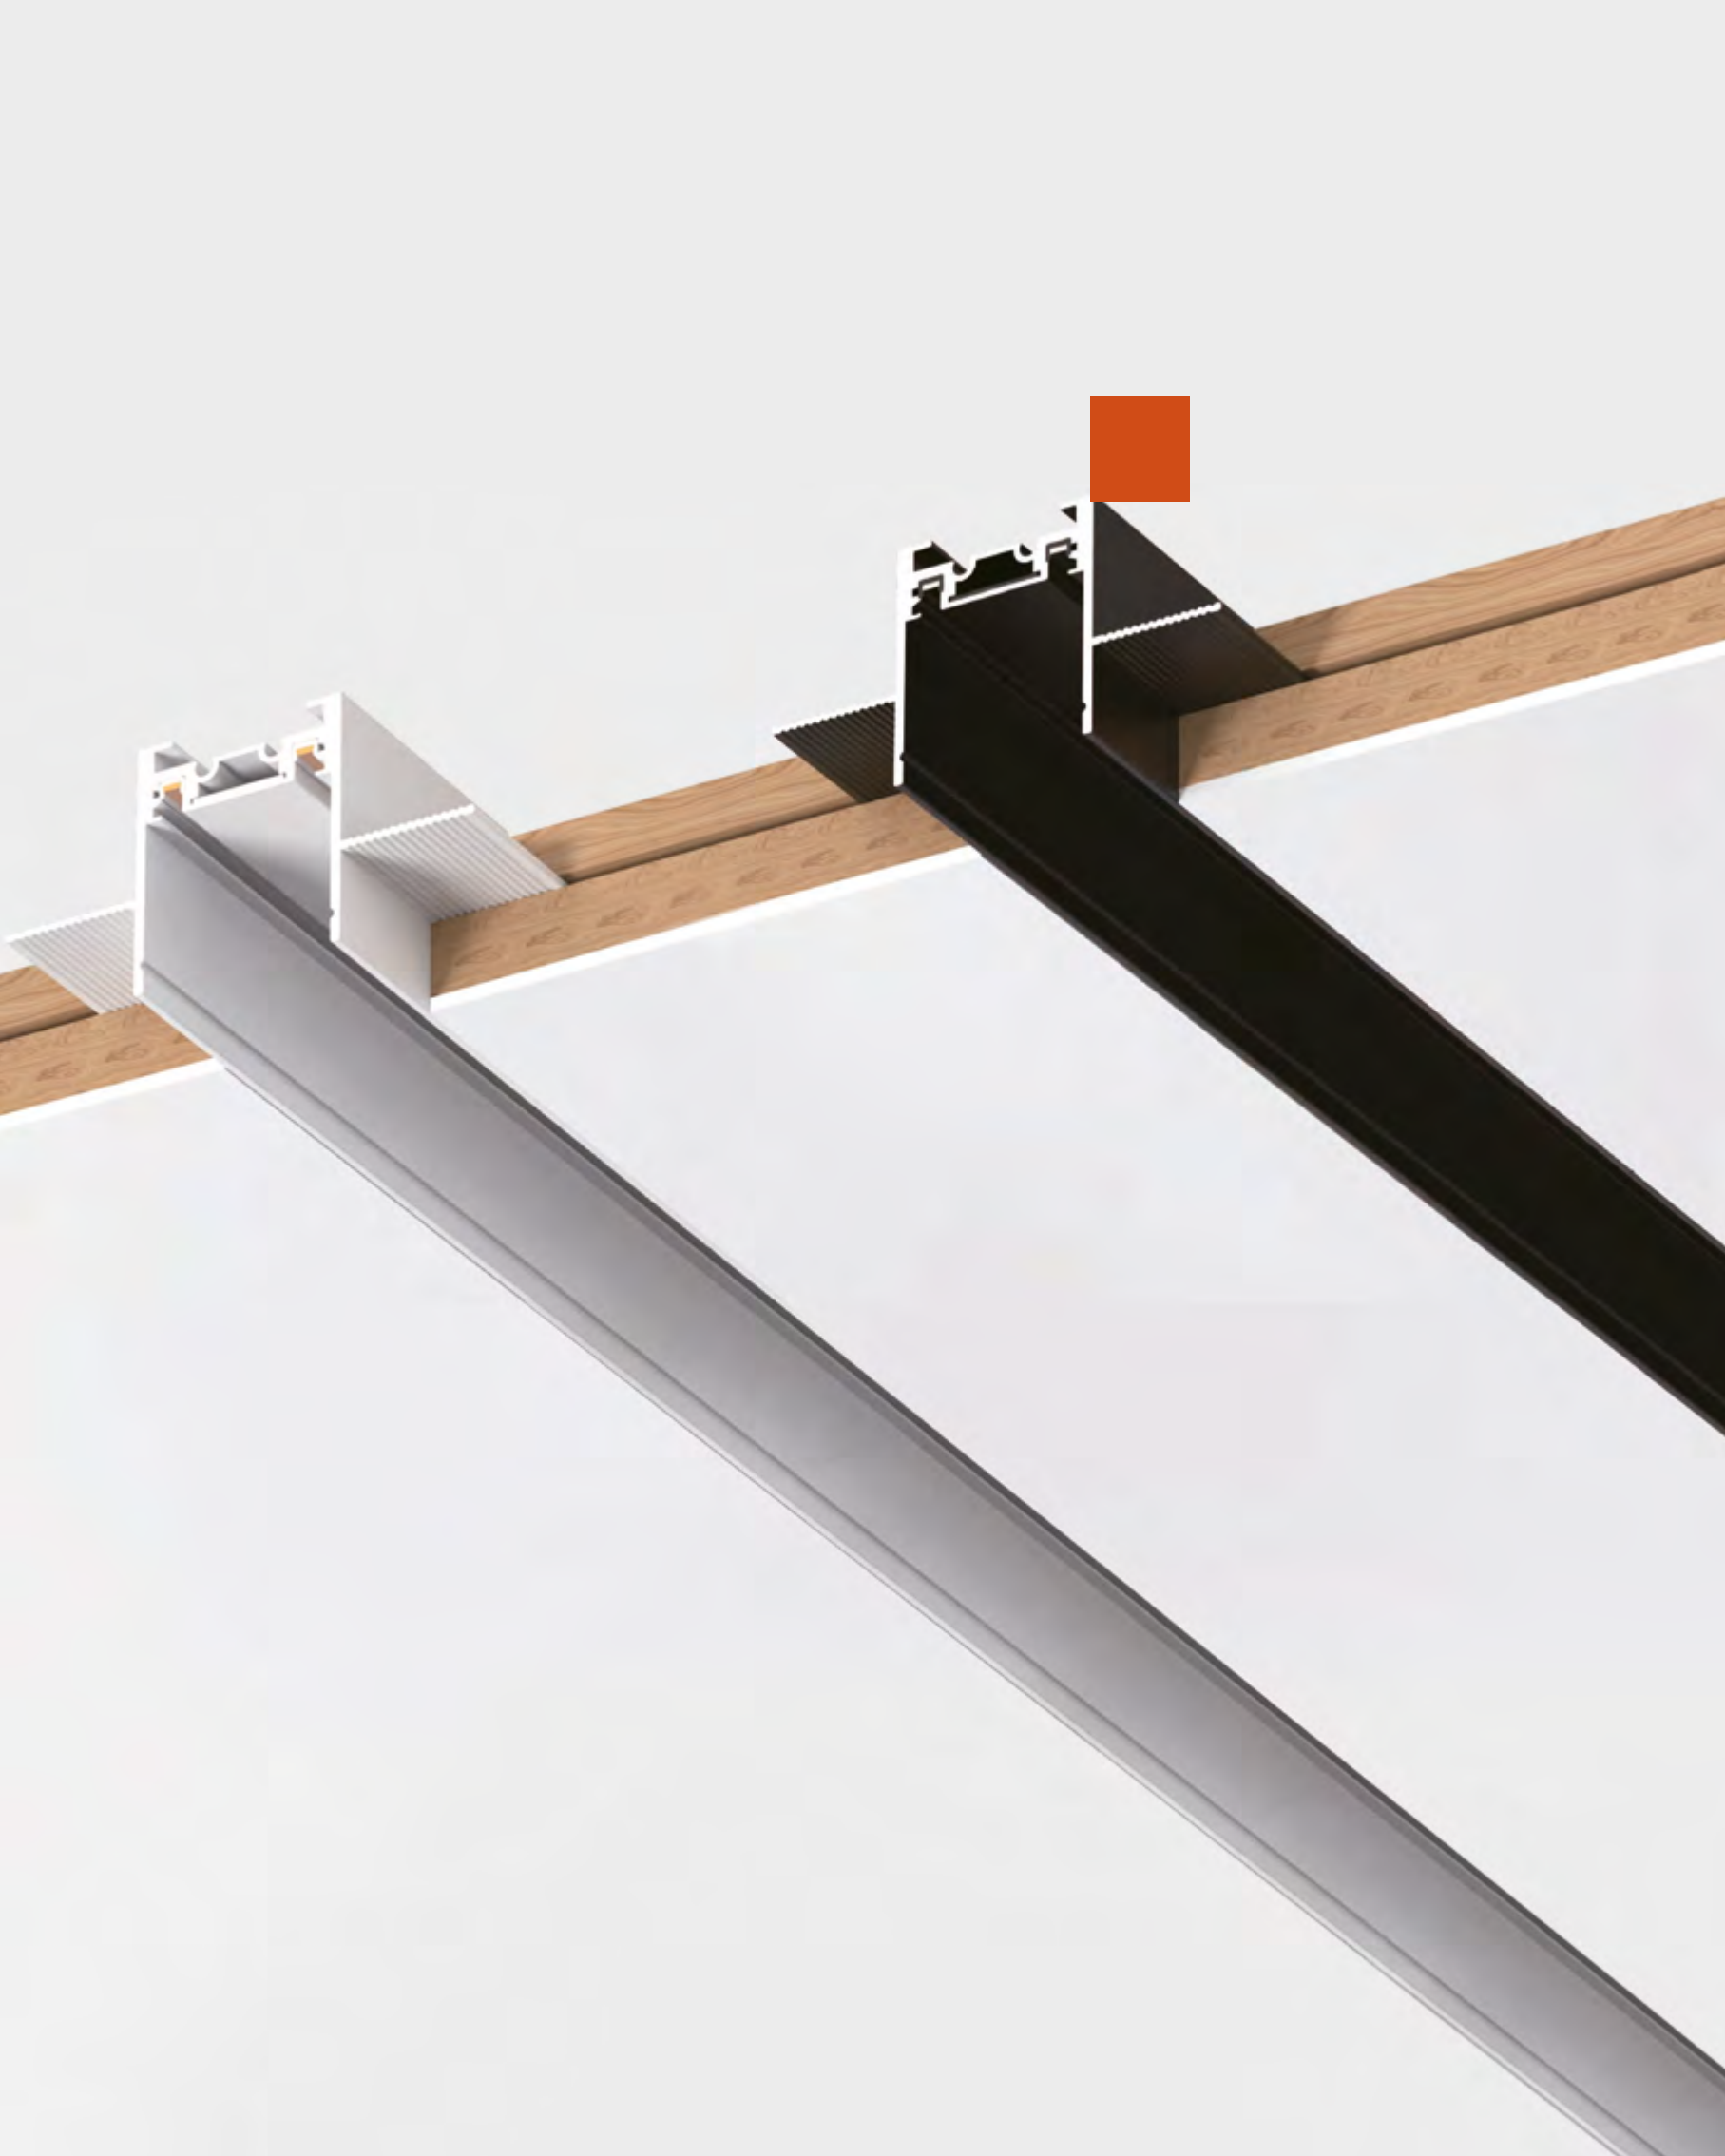

STANDARD



48V Magnetic Track

RECESSED



ONLY 22,8mm WIDTH

Product Code:	Colour:	Description:	Volt:	Profile thickness	Round Copper	Track length:
2-U015148	○ White	STANDARD 48V RECESSED TRACK (inc. end caps & dust proof plastic lead)	48V	1.5 mm	2.0 mm (Diameter)	2,00 m
2-U015141	● Black					

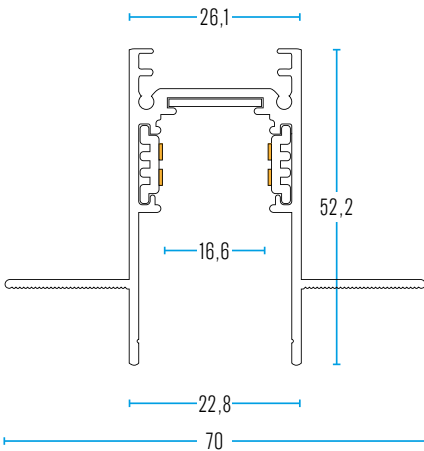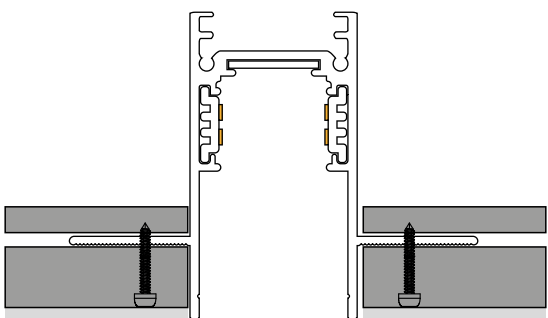

STANDARD



Track Joint

Product Code:	Colour:	Description:	Volt:	Dimension:	Track Length
2-U014311	○ White	HORIZONTAL 90° JOINT	48V		1
2-U014328	● Black	HORIZONTAL 90° JOINT	48V		1
2-U014335	○ White	VERTICAL 90° JOINT	48V		1
2-U014342	● Black	VERTICAL 90° JOINT	48V		1
2-U014434	○ White	MAGNETIC TRACK CONNECTION PLATE	48V		1
2-U014441	● Black	MAGNETIC TRACK CONNECTION PLATE	48V		1

Flexi Joint

Product Code:	Colour:	Description:	Volt:	Track Length
2-U014359	○ White	STRAIGHT JOINT	48V	1
2-U014366	● Black	STRAIGHT JOINT	48V	1


Product Code:	Colour:	Description:	Volt:
2-U014397	○ White	MAGNETIC TRACK FLEXIBLE JOINT	48V
2-U014403	● Black	MAGNETIC TRACK FLEXIBLE JOINT	48V

Product Code:	Colour:	Description:	Volt:
2-U014373	○ White	MAGNETIC TRACK POWER SUPPLY COMPONENT	48V
2-U014380	● Black	MAGNETIC TRACK POWER SUPPLY COMPONENT	48V

Power Supply

Product Code:	Colour:	Description:	Volt:	Current Power
2-U014458	○ White	MAGNETIC TRACK POWER SUPPLY	48V	100W
2-U014465	● Black	MAGNETIC TRACK POWER SUPPLY	48V	100W

Product Code:	Colour:	Description:	Volt:	Current Power
2-U014472	○ White	MAGNETIC TRACK POWER SUPPLY	48V	200W
2-U014489	● Black	MAGNETIC TRACK POWER SUPPLY	48V	200W






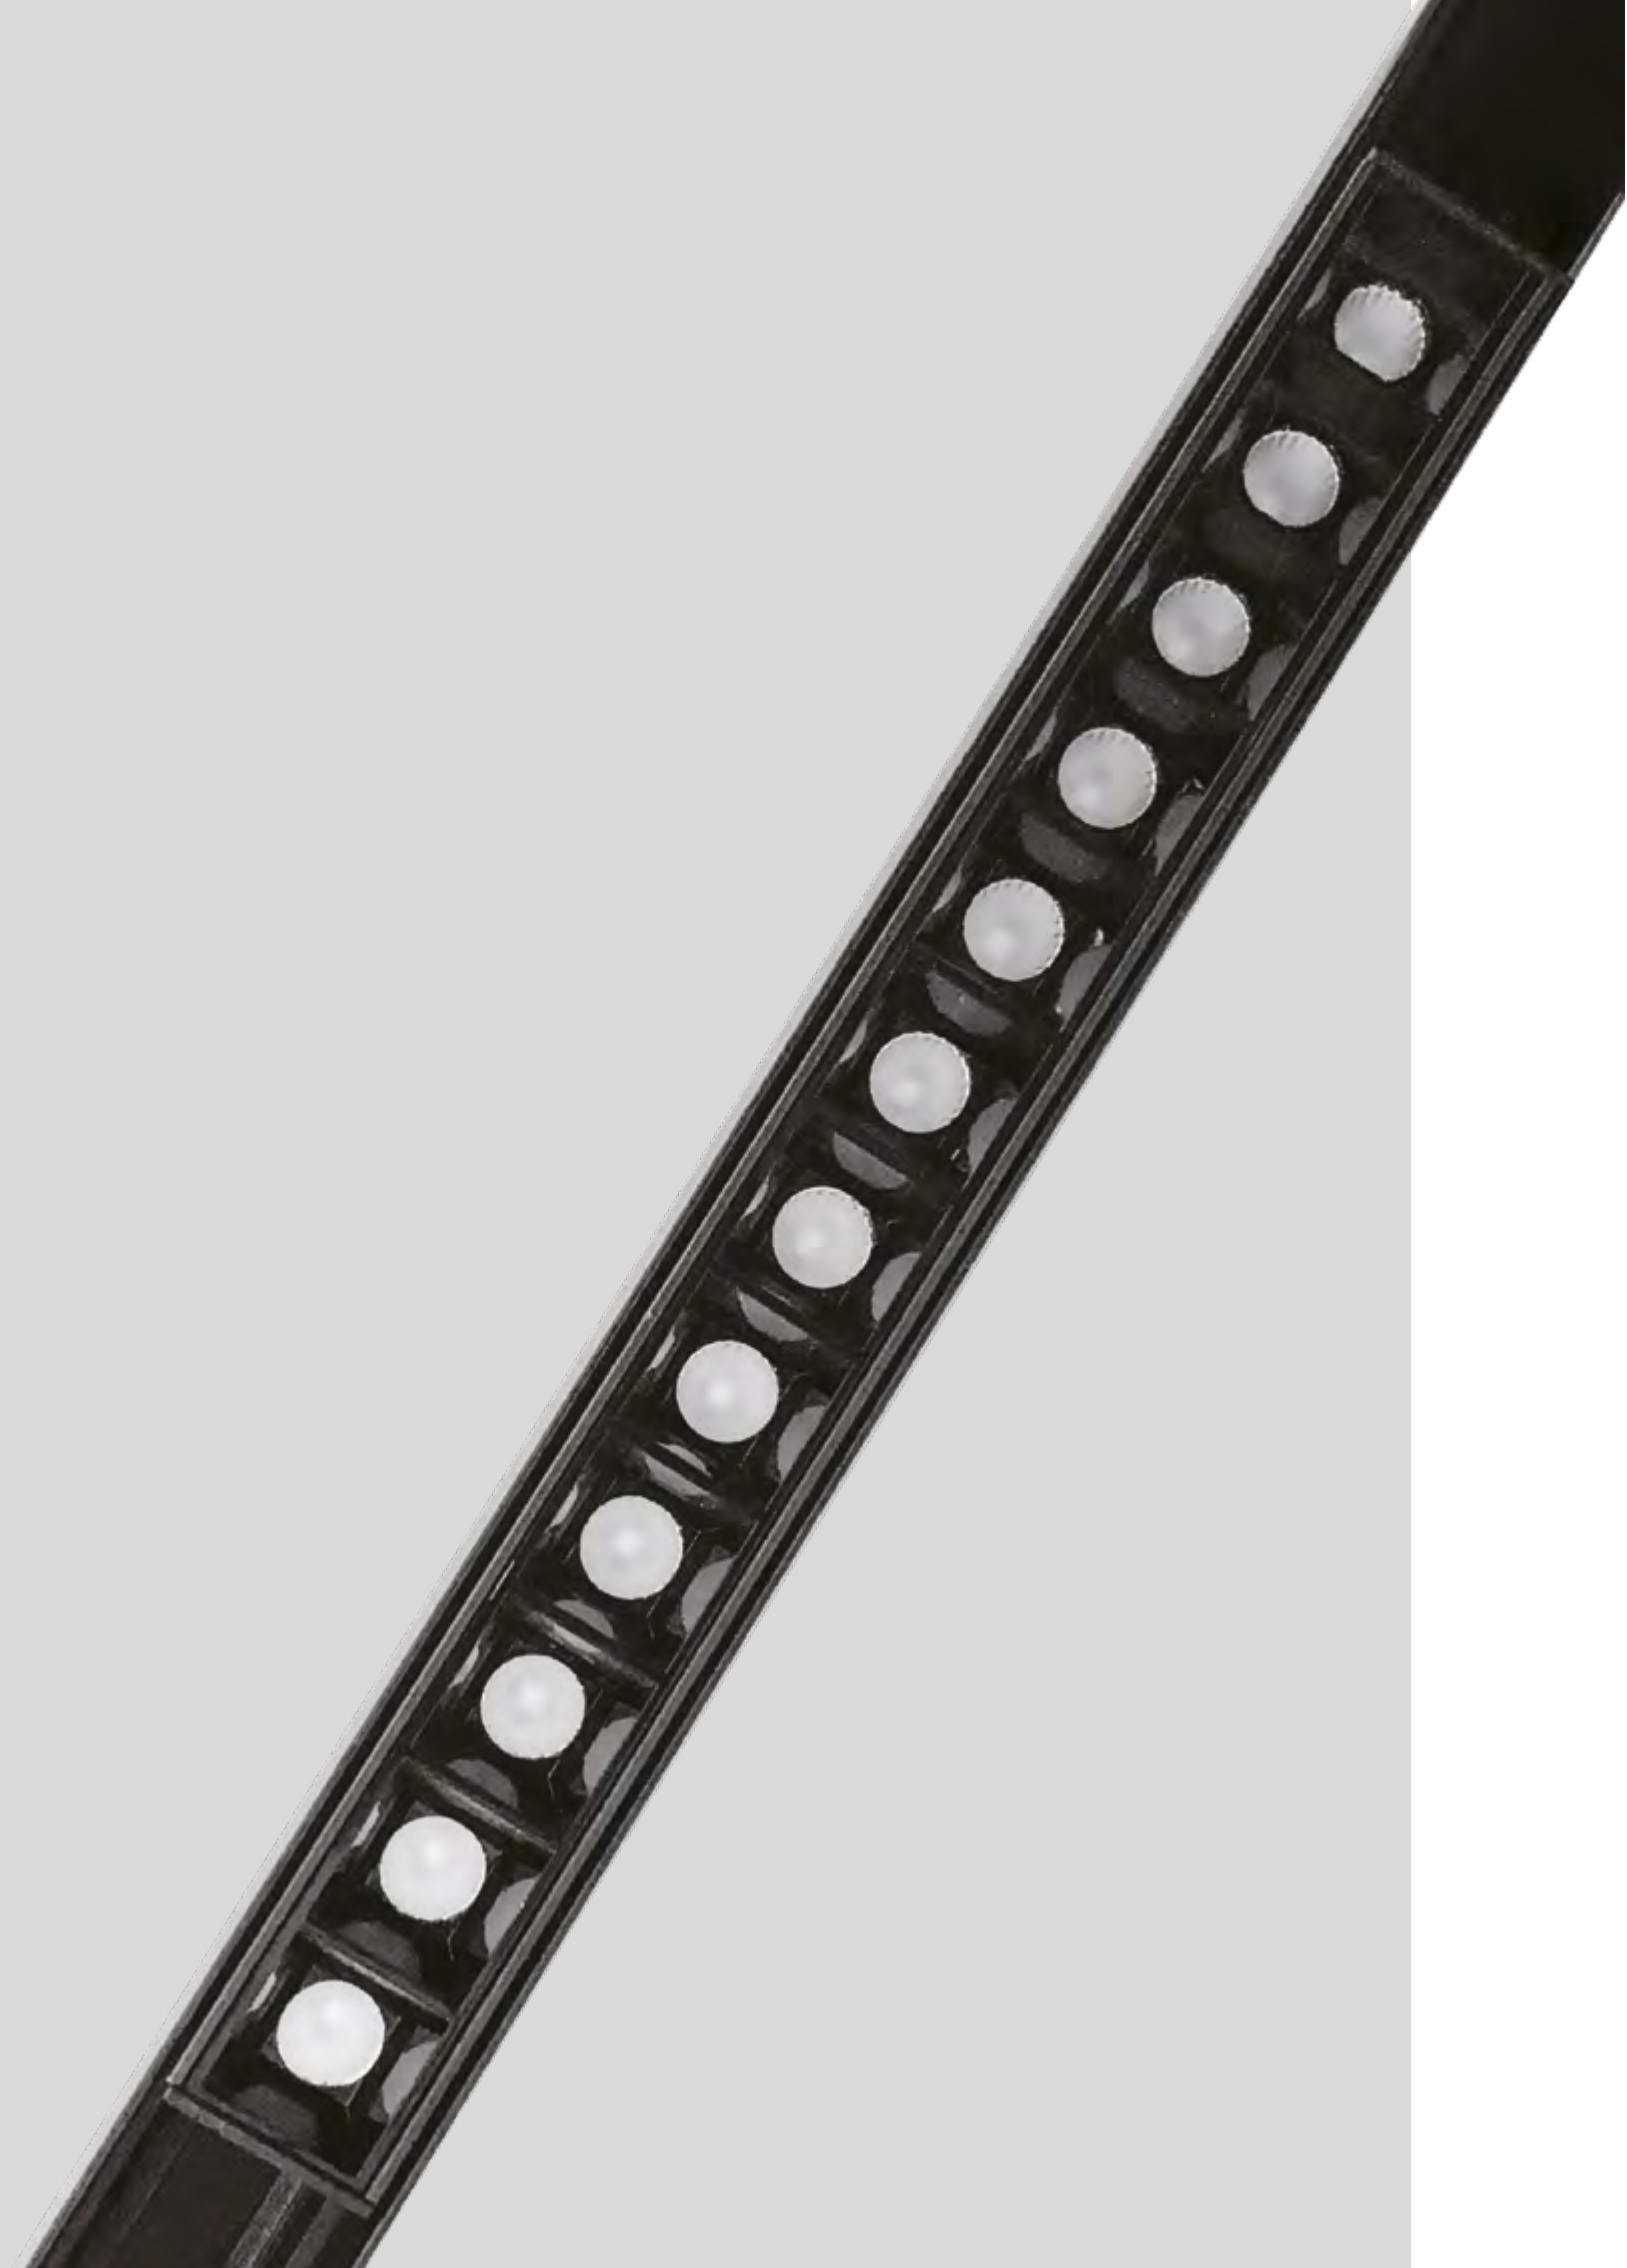


STANDARD

Magnetic Grille Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014496	○ White	12W	960lm	3000K	24°	Standard 48V Magnetic Grille Light	DC48V	>90	OSRAM	220x43,1x22 (WxHxD)mm
2-U014502	● Black	12W	960lm	3000K	24°	Standard 48V Magnetic Grille Light	DC48V	>90	OSRAM	220x43,1x22 (WxHxD)mm
Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014519	○ White	18W	1440lm	3000K	24°	Standard 48V Magnetic Grille Light	DC48V	>90	OSRAM	328x43,1x22 (WxHxD)mm
2-U014526	● Black	18W	1440lm	3000K	24°	Standard 48V Magnetic Grille Light	DC48V	>90	OSRAM	328x43,1x22 (WxHxD)mm

Highlights

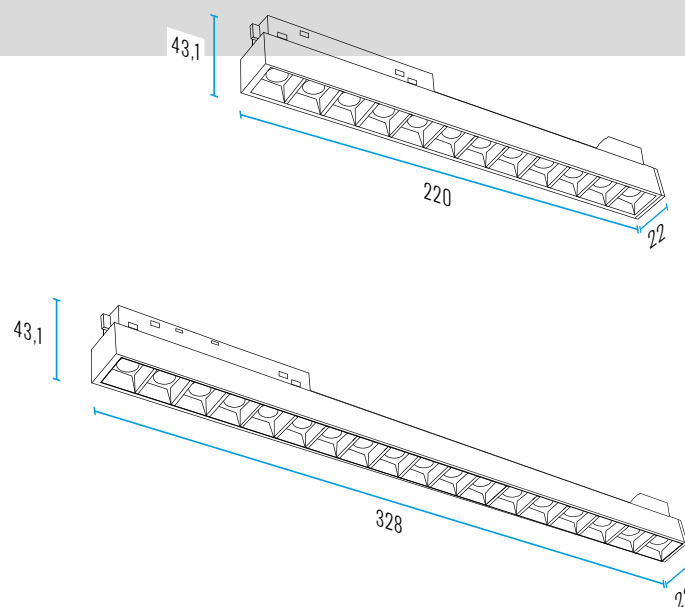

STANDARD

Magnetic Flood Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014533	○ White	12W	750lm	3000K	24°	Slim 48V Magnetic Flood Light	DC48V	>90	OSRAM	220x43,1x22 (WxHxD)mm
2-U014540	● Black	12W	750lm	3000K	24°	Slim 48V Magnetic Flood Light	DC48V	>90	OSRAM	220x43,1x22 (WxHxD)mm

Highlights

Color options

White

Black

Beam angle

24°

Product properties

Indoor

Protection

Eco

No flicker


Gamma

Control & systems options

On Off

OSRAM

LED TECHNOLOGY INCLUDED


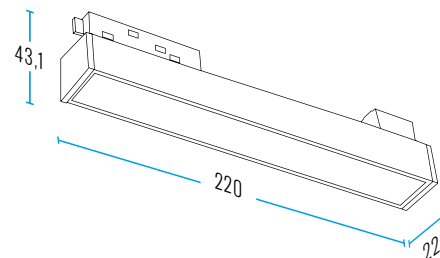


STANDARD

Magnetic Flood Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014557	○ White	18W	1100lm	3000 K	24°	Slim 48V Magnetic Flood Light	DC48V	>90	OSRAM	328x43,1x22 (WxHxD)mm
2-U014564	● Black	18W	1100lm	3000 K	24°	Slim 48V Magnetic Flood Light	DC48V	>90	OSRAM	328x43,1x22 (WxHxD)mm

Highlights

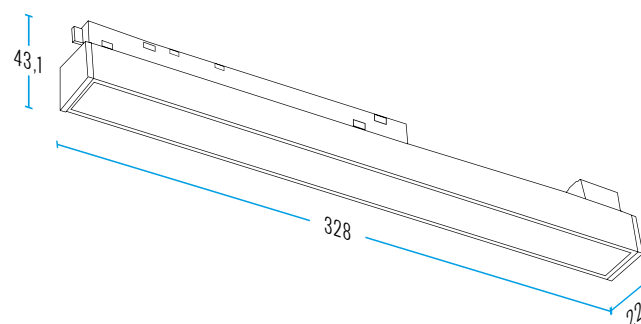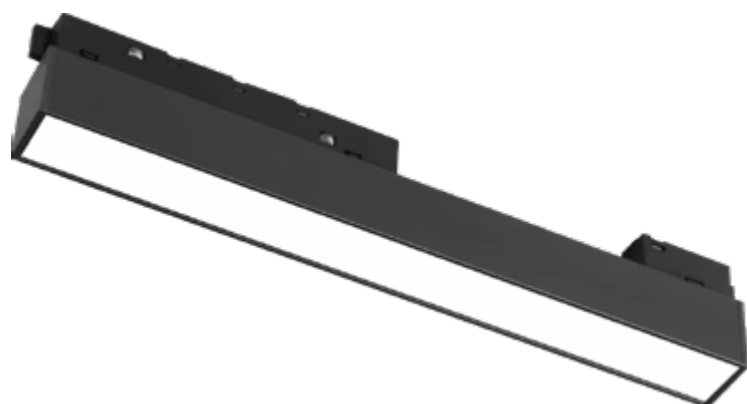

STANDARD

Magnetic Folding Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014571	○ White	12W	960lm	3000K	24°	Slim 48V Magnetic Folding Light	DC48V	>90	OSRAM	235x43,1x22 (WxHxD)mm
2-U014540	● Black	12W	960lm	3000K	24°	Slim 48V Magnetic Folding Light	DC48V	>90	OSRAM	235x43,1x22 (WxHxD)mm

Highlights

Color options

White

Black

Beam angle

24°

Product properties

Indoor

Protection

Eco

No flicker


Gamma

Control & systems options

On Off

OSRAM

LED TECHNOLOGY INCLUDED

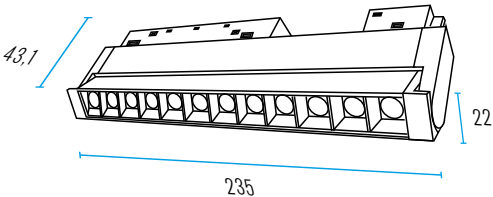

STANDARD

Magnetic Folding Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014595	○ White	18W	1440lm	3000K	24°	Slim 48V Magnetic Folding Light	DC48V	>90	OSRAM	344x68,7x22 (WxHxD)mm
2-U014601	● Black	18W	1440lm	3000K	24°	Slim 48V Magnetic Folding Light	DC48V	>90	OSRAM	344x68,7x22 (WxHxD)mm

Highlights

Color options

White

Black

Beam angle

24°

Product properties

Indoor

Protection

Eco

No flicker


Gamma

Control & systems options

On Off

OSRAM

LED TECHNOLOGY INCLUDED

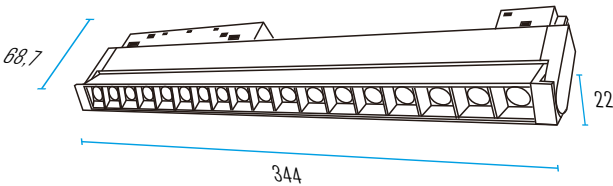

STANDARD

Magnetic Folding Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014618	○ White	12W	750lm	3000K	24°	Slim 48V Magnetic Folding Light	DC48V	>90	OSRAM	235x43,1x22 (WxHxD)mm
2-U014625	● Black	12W	750lm	3000K	24°	Slim 48V Magnetic Folding Light	DC48V	>90	OSRAM	235x43,1x22 (WxHxD)mm

Highlights

Color options

White

Black

Beam angle

24°

Product properties

Indoor

Protection

Eco

No flicker


Gamma

Control & systems options

On Off

OSRAM

LED TECHNOLOGY INCLUDED

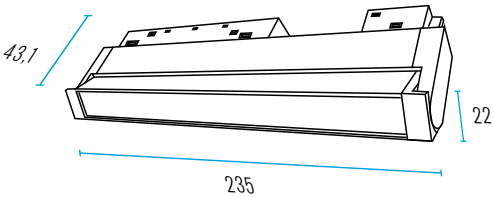

STANDARD

Magnetic Folding Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014632	○ White	30W	1100lm	3000 K	24°	Slim 48V Magnetic Folding Light	DC48V	>90	OSRAM	344x68,7x22 (WxHxD)mm
2-U014649	● Black	30W	1100lm	3000 K	24°	Slim 48V Magnetic Folding Light	DC48V	>90	OSRAM	344x68,7x22 (WxHxD)mm

Highlights

White

Black

Color options

24°

Beam angle

Indoor

Product properties

Protection

IP20

Eco

No flicker


Gamma

On Off

Control & systems options

OSRAM

LED TECHNOLOGY INCLUDED

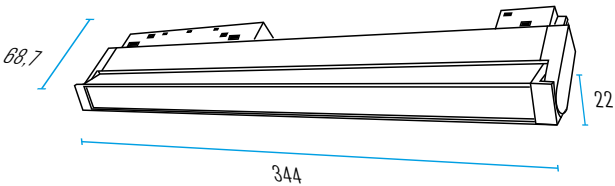








STANDARD

Magnetic Spot Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U015219	○ White	10W	850lm	3000K	36°	Slim 48V Magnetic Spot Light	DC48V	>90	OSRAM	Φ50x153x100 (DxWxH)mm
2-U015202	● Black	10W	850lm	3000K	36°	Slim 48V Magnetic Spot Light	DC48V	>90	OSRAM	Φ50x153x100 (DxWxH)mm

Highlights

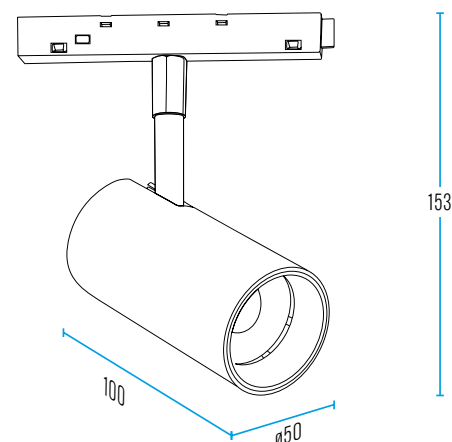

STANDARD

Magnetic Spot Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014656	○ White	20W	1700lm	3000 K	36°	Slim 48V Magnetic Spot Light	DC48V	>90	OSRAM	Φ60x140x115 (DxWxH)mm
2-U014663	● Black	20W	1700lm	3000 K	36°	Slim 48V Magnetic Spot Light	DC48V	>90	OSRAM	Φ60x140x115 (DxWxH)mm

Highlights

Color options

White

Black

Beam angle

36°

Product properties

Indoor

Protection

Eco

No flicker


Gamma

Control & systems options

On Off

OSRAM

LED TECHNOLOGY INCLUDED






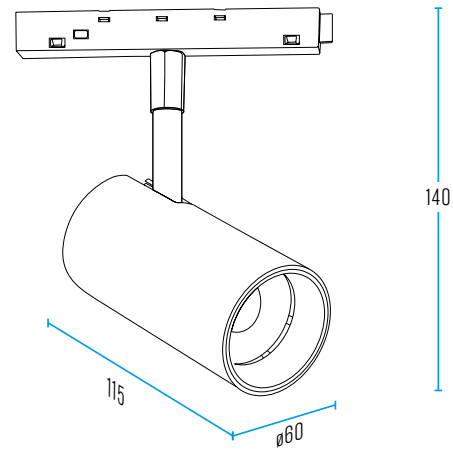


STANDARD

Magnetic Spot Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014670	○ White	30W	2550lm	3000K	36°	Slim 48V Magnetic Spot Light	DC48V	>90	OSRAM	Φ70x208x155 (DxWxH)mm
2-U014687	● Black	30W	2550lm	3000K	36°	Slim 48V Magnetic Spot Light	DC48V	>90	OSRAM	Φ70x208x155 (DxWxH)mm

Highlights

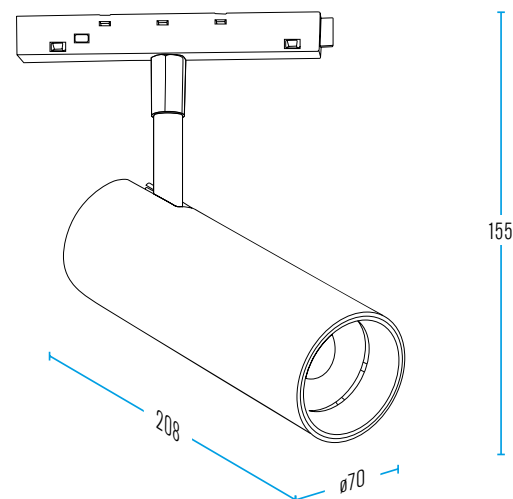









STANDARD

Magnetic Suspension Light

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U015233	○ White	10W	850lm	3000K	36°	Slim 48V Magnetic Suspension Light	DC48V	>90	OSRAM	Φ50x100 (DxH)mm
2-U015226	● Black	10W	850lm	3000K	36°	Slim 48V Magnetic Suspension Light	DC48V	>90	OSRAM	Φ50x100 (DxH)mm
Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014694	○ White	20W	1700lm	3000K	36°	Slim 48V Magnetic Suspension Light	DC48V	>90	OSRAM	Φ60x115 (DxH)mm
2-U014700	● Black	20W	1700lm	3000K	36°	Slim 48V Magnetic Suspension Light	DC48V	>90	OSRAM	Φ60x115 (DxH)mm

Highlights

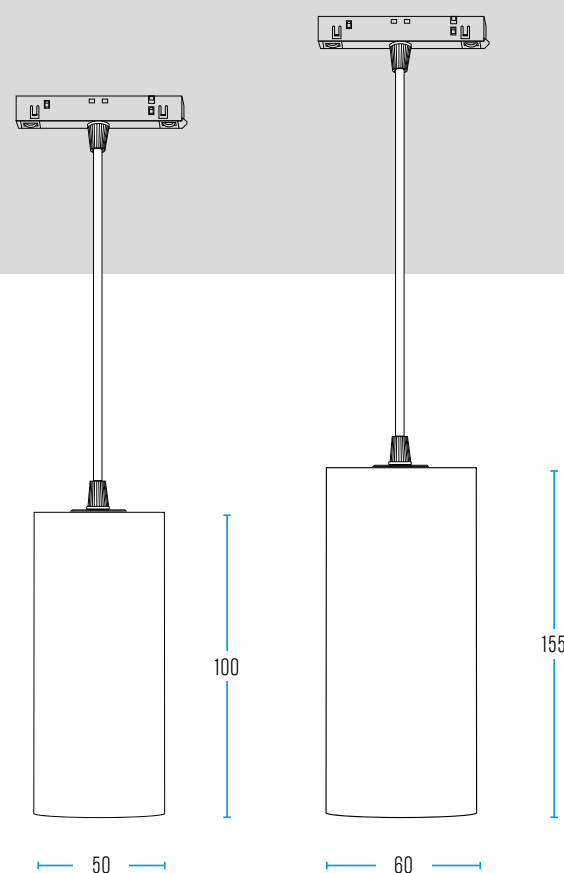








STANDARD

Magnetic Soft Light

NEW

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	RA:	LEDs:	Dimension:
2-U014977	○ White	6W	510lm	3000K	180°	Slim 48V Magnetic Soft Light	DC48V	>90	OSRAM	100x160 (DxH)mm
2-U014960	● Black	6W	510lm	3000K	180°	Slim 48V Magnetic Soft Light	DC48V	>90	OSRAM	100x160 (DxH)mm

Highlights

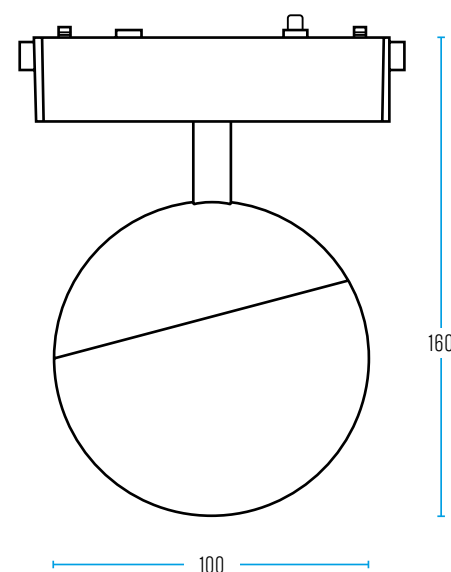




Surface Mounted Luminaire Fixed




Product Code:	Colour:	Watt:	Lamp:	Cap:	Description:	Volt:	Pack/pcs:
2-U011792	○ White	50W	MR16	GU10	Surface mounted luminaire for MR16/GU10 - fixed	230V	1/50
2-U011785	● Black	50W	MR16	GU10		230V	1/50




Surface mounted

Surface mounted Luminaire Adjustable



Product Code:	Colour:	Watt:	Lamp:	Cap:	Description:	Volt:	Pack/pcs:
2-U014939	○ White	50W	MR16	GU10	Surface mounted luminaire for MR16/GU10 - adjustable	230V	1/50
2-U014922	● Black	50W	MR16	GU10		230V	1/50


Surface mounted Luminaire Adjustable



Product Code:	Colour:	Watt:	Lamp:	Cap:	Description:	Volt:	Pack/pcs:
2-U014953	○ White	50W	MR16	GU10	Surface mounted luminaire for MR16/GU10 - adjustable	230V	1/50
2-U014946	● Black	50W	MR16	GU10		230V	1/50

3-PHASE TRACK

4 Wires Square



Euro Standard



3-PHASE SQUARE TRACK 1M LENGTH

2-IV7511-10-31

White



2-IV7511-10-30

Black



3-PHASE SQUARE TRACK 2M LENGTH

2-IV7511-20-31

White



2-IV7511-20-30

Black



3-PHASE SQUARE TRACK 3M LENGTH

2-IV7511-30-31

White



2-IV7511-30-30

Black



Power supply



ELECTROMECHANICAL ADAPTOR 6A

2-U013529

White

2-U013536

Black



ELECTROMECHANICAL ADAPTOR 6A (10kg)

2-U015134

White

2-U015127

Black

Joints



RIGHT LIVE END

2-U013437

White

2-U013444

Black



STRAIGHT CONNECTOR

2-U015059

White

2-U015042

Black



L CONNECTOR

2-U013437

White

2-U013444

Black



T CONNECTOR

2-U015097

White

2-U015080

Black



MOBILE JOINT

2-U013475

White

2-U013482

Black



X CONNECTOR

2-U015110

White

2-U015103

Black

Accessories



CEILING ROSETTE WITH 3PHASE TRACK

2-U013512

White

2-U007016

Black



ELECTRICAL STRAIGHT JOINT

2-U013413

White

2-U013420

Black



SUSPENSION KIT

2-U015110

White

2-U015103

Black



END CAP

2-U013451

White


2-U013468

Black

Track Spot GU10 Lamp



The lamp is not included.
The lamp is positioned a little deeper to reduce glare.

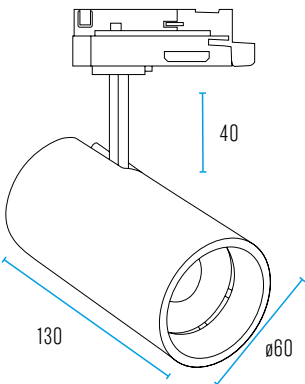


Product Code:	Colour:	Watt:	Lamp:	Cap:	Description:	Volt:	Pack/pcs:
2-U013352	○ White	50W	MR16	GU10	Track Spot	230V	1/50
2-U013369	● Black	50W	MR16	GU10	for MR16/GU10 lamp with 4-Wires Adaptor	230V	1/50

Track Spot GU10 Lamp



The lamp is not included
The lamp is positioned a little deeper to reduce glare

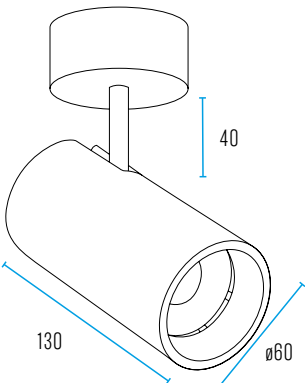

Product Code:	Colour:	Watt:	Lamp:	Cap:	Description:	Volt:	Pack/pcs:
2-U014892	○ White	50W	MR16	GU10	Track Spot	230V	1/50
2-U014885	● Black	50W	MR16	GU10	for MR16/GU10 lamp with 4-Wires Adaptor	230V	1/50


3-PHASE TRACK

Cube series




The cube series is a range of recessed, outdoor and spot rail products with high specifications.

The cube series uses OSRAM Led chip and branded driver and CRI>90 colour rendering index.

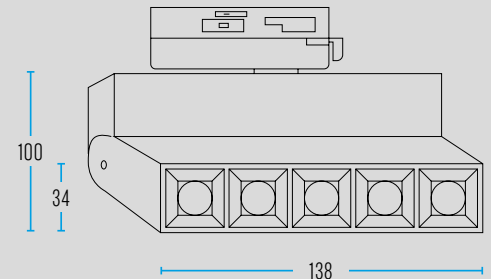


Highlights

The dimming coefficient is UGR<16




Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	Lifetime:	Temperature:	RA:	UGR:	LEDs:	Dimension:
2-U008693	○ White	10W	1000	3000K	45°	LED Cube track spot	240V	30.000 hrs	-10° ~ 45°C	>90	<16	OSRAM	138x34x100 mm
2-U008709	● Black	10W	1000	3000K	45°	4 wires adaptor	240V	30.000 hrs	-10° ~ 45°C	>90	<16	OSRAM	138x34x100 mm

Spot CCT tunable




CCT TUNABLE WHITE

This particular track spot is CCT tunable white. On the back of the spotlight there is a switch which can be easily moved to change the Kelvin between **3000K, 4000K and 5000K**

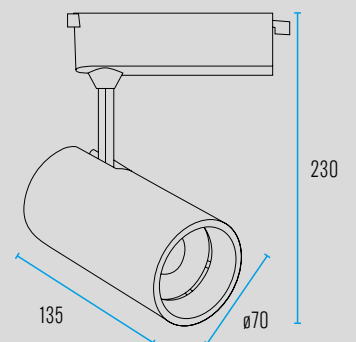




Highlights

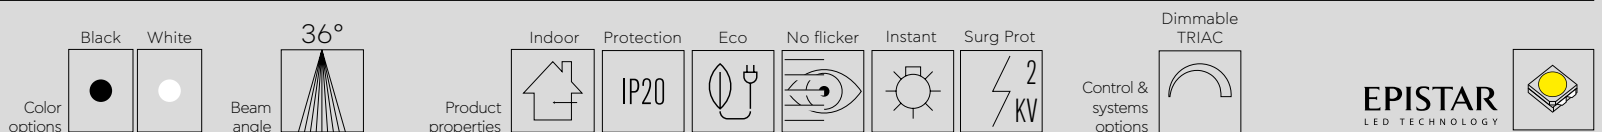


Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	Lifetime:	Temperature:	CRI:	CRI:	LEDs:	Pack/pcs:
2-U011891	○ White	30W	2850	3000K	36°	LED COB track spot	220V-240V	30.000 hrs	-10° ~ 45°C	>84	>0.95	EPISTAR	1/20
2-U011907	● Black	30W	2850	4000K 5000K	36°	2 wires adaptor CCT tunable	220V-240V	30.000 hrs	-10° ~ 45°C	>84	>0.95	EPISTAR	1/20

Spot CCT & Watt tunable



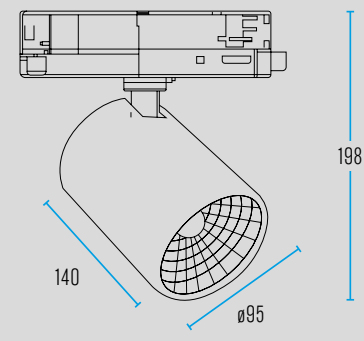

CCT TUNABLE WHITE
 This particular track spot is CCT tunable white. At the back of the spot there is a switch which is very easy to change by moving it. the Kelvin between **3000K, 4000K** and **6000K** but also the watts between **20W, 24W** and **28W**

Highlights

Color options

Black

White

Beam angle

36°

Product properties

Indoor

Protection IP20

Eco

No flicker

Instant

Surg Prot 4 KV

Dimmable TRIAC


Control & systems options


COIE DRIVER INSIDE


BRIDGELUX LED

Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	Lifetime:	Temperature:	RA:	CRI:	LEDs:	Pack/pcs:
2-U014915	White	20W	1900	3000 K	36°	LED COB track spot	230V	30.000 hrs	-10° ~ 45°C	>90	>0.95	BRIDGELUX	1/20
2-U014908	Black	24W 28W	2280 2660	4000K 6000K		4 wires adaptor CCT tunable, Watt tunable	230V	30.000 hrs	-10° ~ 45°C	>90	>0.95	BRIDGELUX	1/20

Spot CCT tunable high performance





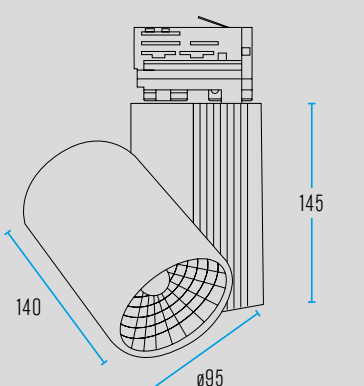

CCT TUNABLE WHITE
 This particular track spot is CCT tunable white. On the back of the spotlight there is a switch which can be easily moved to change the Kelvin between **3000K, 4000K** and **6000K**

Highlights

Color options

Black

White

Beam angle

38°

Product properties

Indoor

Protection IP20

Eco

No flicker

Instant

Surg Prot 2 KV

Dimmable TRIAC

Control & systems options

COIE DRIVER INSIDE

BRIDGELUX LED


Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	Lifetime:	Temperature:	CRI:	CRI:	LEDs:	Pack/pcs:
2-U013079	White	30W	2850	3000 K	38°	LED COB track spot	220V-240V	30.000 hrs	-10° ~ 45°C	>82	>0.95	EPISTAR	1/20
2-U013086	Black	30W	2850	4000K 5000K		2 wires adaptor CCT tunable	220V-240V	30.000 hrs	-10° ~ 45°C	>82	>0.95	EPISTAR	1/20

3-PHASE TRACK



MADE IN ITALY

Square



Euro Standard



3-PHASE SQUARE TRACK 1M LENGTH

2-IV7511-10-31	○ White
2-IV7511-10-30	● Black


3-PHASE SQUARE TRACK 2M LENGTH

2-IV7511-20-31	○ White
2-IV7511-20-30	● Black

3-PHASE SQUARE TRACK 3M LENGTH


2-IV7511-30-31	○ White
2-IV7511-30-30	● Black

ELECTROMECHANICAL ADAPTOR 6A (10kg)




2-IV7600-00-31	○ White
2-IV7600-00-30	● Black

ELECTROMECHANICAL ADAPTOR 6A (5kg)




2-IV7558-00-31	○ White
2-IV7558-00-30	● Black

DRIVER ADAPTOR 8,8-31W 200-700mA (5kg)




2-IV7557-00-31	○ White
2-IV7557-00-30	● Black

CENTRAL CONNECTOR & LIVE END



2-IV7652-10-W31	○ White
2-IV7652-10-W30	● Black

RIGHT LIVE END




2-IV7652-11-W31	○ White
2-IV7652-11-W30	● Black

LEFT LIVE END

2-IV7653-10-W31	○ White
2-IV7653-10-W30	● Black

INSIDE L JOINT




2-IV7655-10-W31	○ White
2-IV7655-10-W30	● Black

OUTSIDE L JOINT

2-IV7655-11-W31	○ White
2-IV7655-11-W30	● Black


RIGHT T JOINT



2-IV7656-10-W31	○ White
2-IV7656-10-W30	● Black

LEFT T JOINT


2-IV7656-11-W31	○ White
2-IV7656-11-W30	● Black



SUSPENSION KIT 2M


2-IV7606-00-31	○ White
2-IV7606-00-30	● Black

X JOINT




2-IV7657-10-W31	○ White
2-IV7657-10-W30	● Black

MOBILE JOINT




2-IV7660-00-W31	○ White
2-IV7660-00-W30	● Black

FLEXIBLE JOINT




2-IV7658-10-W31	○ White
2-IV7658-10-W30	● Black

ELECTRICAL STRAIGHT JOINT




2-IV7604Q-10-W31	○ White
2-IV7604Q-10-W30	● Black

MECHANICAL ADAPTOR WITH AUTOMATIC LOCKING AND STEEL WIRE




2-IV7618-00-31	○ White
2-IV7618-00-30	● Black

MECHANICAL ADAPTOR



2-IV7625-00-31	○ White
2-IV7625-00-30	● Black

END CAP



2-IV7659-00-31	○ White
2-IV7659-00-30	● Black

CEILING KIT

2-IV7607-00-00





PLATE 120mm

2-IV7606-04-00




NUT FOR ELECTRO MECHANICAL ADAPTOR M10X1

2-IV7652-10-W31




TRACK COVER 1000mm

2-IV7624-00



Square Recessed

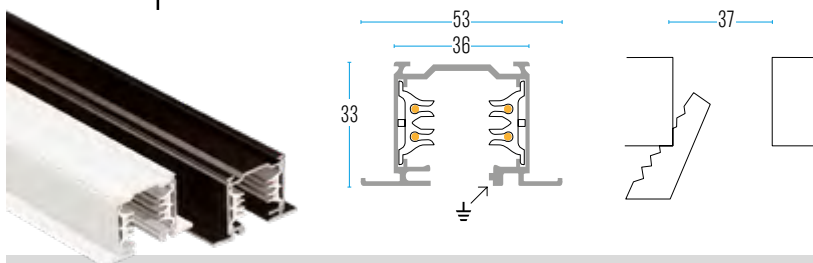

Euro Standard



3-PHASE RECESSED SQUARE TRACK 1M LENGTH

2-IV7512-10-30	○ White
2-IV7512-10-31	● Black

3-PHASE RECESSED SQUARE TRACK 2M LENGTH

2-IV7512-20-30	○ White
2-IV7512-20-31	● Black

3-PHASE RECESSED SQUARE TRACK 3M LENGTH

2-IV7512-30-30	○ White
2-IV7512-30-31	● Black

ELECTROMECHANICAL ADAPTOR 6A (10kg)


2-IV7600-00-31	○ White
2-IV7600-00-30	● Black

ELECTROMECHANICAL ADAPTOR 6A (5kg)

2-IV7558-00-31	○ White
2-IV7558-00-30	● Black

DRIVER ADAPTOR 8,8-31W 200-700mA (5kg)

2-IV7557-00-31	○ White
2-IV7557-00-30	● Black



SUSPENSION KIT 2M

2-IV7606-00-31	○ White
2-IV7606-00-30	● Black

RIGHT LIVE END

2-IV7662-10-W31	○ White
2-IV7662-10-W30	● Black

LEFT LIVE END

2-IV7662-11-W31	○ White
2-IV7662-11-W30	● Black

CENTRAL CONNECTOR & LIVE END

2-IV7663-10-W31	○ White
2-IV7663-10-W30	● Black

MECHANICAL ADAPTOR WITH AUTOMATIC LOCKING AND STEEL WIRE

2-IV7618-00-31	○ White
2-IV7618-00-30	● Black

MECHANICAL ADAPTOR

2-IV7625-00-31	○ White
2-IV7625-00-30	● Black

SUSPENSION FOR FALSE CEILING

2-IV7664-00-48

ELECTRICAL STRAIGHT JOINT

2-IV7604Q-10-W31	○ White
2-IV7604Q-10-W30	● Black

END CAP

2-IV7659I-00-W31	○ White
2-IV7659I-00-W30	● Black

NUT FOR ELECTRO MECHANICAL ADAPTOR M10x1

2-IV7609-00-00

CEILING KIT

2-IV7607-00-00

TRACK COVER 1000mm


2-IV7624-00

1-PHASE TRACK



MADE IN ITALY

DMK Square



Euro Standard



DKM 1-PHASE SQUARE TRACK 1M LENGTH

2-IV7520-10-31	○ White
2-IV7520-10-30	● Black

DKM 1-PHASE SQUARE TRACK 2M LENGTH

2-IV7520-20-31	○ White
2-IV7520-20-30	● Black

DKM 1-PHASE SQUARE TRACK 3M LENGTH

2-IV7520-30-31	○ White
2-IV7520-30-30	● Black

DALI ELECTRO/MECHANICAL ADAPTOR 6A

2-IV7559-00-31	○ White
2-IV7559-00-30	● Black

CENTRAL CONNECTOR AND STRAIGHT JOINT-WHITE

2-IV7661-10-W31	○ White
2-IV7661-10-W30	● Black

RIGHT LIVE END

2-IV7651-10-W31	○ White
2-IV7651-10-W30	● Black

LEFT LIVE END

2-IV7651-11-W31	○ White
2-IV7651-11-W30	● Black

INSIDE L JOINT

2-IV7655-10-W31	○ White
2-IV7655-10-W30	● Black

RIGHT T JOINT

2-IV7656-10-W31	○ White
2-IV7656-10-W30	● Black

OUTSIDE L JOINT

2-IV7655-11-W31	○ White
2-IV7655-11-W30	● Black

LEFT T JOINT

2-IV7656-11-W31	○ White
2-IV7656-11-W30	● Black

SUSPENSION KIT 2M

2-IV7606-00-31	○ White
2-IV7606-00-30	● Black

X JOINT

2-IV7657-10-W31	○ White
2-IV7657-10-W30	● Black

MOBILE JOINT

2-IV7660-00-W31	○ White
2-IV7660-00-W30	● Black

FLEXIBLE JOINT

2-IV7658-10-W31	○ White
2-IV7658-10-W30	● Black

ELECTRICAL STRAIGHT JOINT

2-IV7604Q-10-W31	○ White
2-IV7604Q-10-W30	● Black

MECHANICAL ADAPTOR WITH AUTOMATIC LOCKING AND STEEL WIRE

2-IV7618-00-31	○ White
2-IV7618-00-30	● Black

MECHANICAL ADAPTOR

2-IV7625-00-31	○ White
2-IV7625-00-30	● Black

END CAP

2-IV7659-00-31	White
2-IV7659-00-30	Black

CEILING KIT

2-IV7607-00-00

PLATE 120mm

2-IV7606-04-00



NUT FOR ELECTRO MECHANICAL ADAPTOR M10X1

2-IV7609-00-00

TRACK COVER 1000mm

2-IV7624-00

DMK Square Recessed

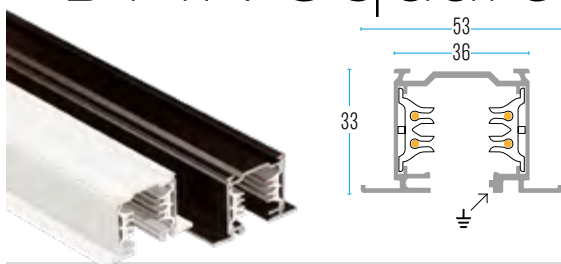

Euro Standard




1-PHASE DMK SQUARE TRACK 2M LENGTH

2-IV7521-20-31


1-PHASE DMK SQUARE TRACK 3M LENGTH

2-IV7521-30




DALI ELECTRO/MECHANICAL ADAPTOR 6A

2-IV7559-00-31 ○ White
2-IV7559-00-30 ● Black




RIGHT LIVE END

2-IV7665-10-W31 ○ White
2-IV7665-10-W32 ● Black



LEFT LIVE END

2-IV7665-11-W31 ○ White
2-IV7665-11-W32 ● Black




CENTRAL CONNECTOR & STRIAIGHT JOINT

2-IV7666-10-W31 ○ White
2-IV7666-10-W30 ● Black


SUSPENSION FOR FALSE CEILING

2-IV7664-00-48




MECHANICAL ADAPTOR WITH AUTOMATIC LOCKING AND STEEL WIRE

2-IV7618-00-31 ○ White
2-IV7618-00-30 ● Black




MECHANICAL ADAPTOR

2-IV7625-00-31 ○ White
2-IV7625-00-30 ● Black




ELECTRICAL STRAIGHT JOINT

2-IV7604Q-10-W31 ○ White
2-IV7604Q-10-W30 ● Black



END CAP

2-IV7659I-00-W31 ○ White
2-IV7659I-00-W30 ● Black




NUT FOR ELECTRO MECHANICAL ADAPTOR M10X1

2-IV7609-00-00




CEILING KIT

2-IV7607-00-00




TRACK COVER 1000mm

2-IV7624-00



1-PHASE TRACK

2 Wire Square



Euro Standard

RED Copper: Φ 1,5mm
Profile thickness: 0,5mm

1-PHASE SQUARE TRACK 3M LENGTH
WITH RIGHT LIVE END & END CAP

2-U013093	○ White
2-U013109	● Black

1-PHASE SQUARE TRACK 3M LENGTH
WITH RIGHT LIVE END & END CAP

2-U013116	○ White
2-U013123	● Black

Power Supply



ELECTRO/MECHANICAL ADAPTOR 6A

2-U013277	○ White
2-U013284	● Black

Flexi Joint



RIGHT LIVE END

2-U013437	○ White
2-U013444	● Black



L CONNECTOR

2-U013437	○ White
2-U013444	● Black



FLEXIBLE JOINT

2-U013475	○ White
2-U013482	● Black



SUSPENSION KIT

2-U013475	○ White
2-U013482	● Black



ELECTRICAL STRAIGHT JOINT

2-U015059	○ White
2-U015042	● Black



T CONNECTOR

2-U015097	○ White
2-U015080	● Black



X CONNECTOR

2-U015110	○ White
2-U015103	● Black




X CONNECTOR

2-U015110	○ White
2-U015103	● Black




The lamp is not included

The lamp is positioned a little deeper to reduce glare




Product Code:	Colour:	Watt:	Lamp:	Description:	Volt:	Pack/pcs:
2-U013338	○ White	50W	GU10	Track Spot for MR16/GU10 lamp	230V	1/50
2-U013345	● Black	50W	GU10	Track Spot with 2-Wires Adaptor	230V	1/50




CCT TUNABLE WHITE

Το συγκεκριμένο σποτ ράγας είναι CCT tunable white. Στο πίσω μέρος του σποτ υπάρχει ένας διακόπτης ο οποίος πολύ ευκολά μετακινώντας τον αλλάζουμε τα Kelvin μεταξύ 3000K - 4000K και 6000K




Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	Lifetime:	Temperature:	RA:	LEDs:	Pack/pcs:
2-U013291	○ White	20W	1900	3000K	36°	LED COB track spot	220V-240V	30.000 hrs	-10° ~ 45°C	>80	EPISTAR	1/20
2-U013345	● Black	20W	1900	4000K 6000K	36°	2 wires adaptor CCT tunable	220V-240V	30.000 hrs	-10° ~ 45°C	>80	EPISTAR	1/20



CCT TUNABLE WHITE

Το συγκεκριμένο σποτ ράγας είναι CCT tunable white. Στο πίσω μέρος του σποτ υπάρχει ένας διακόπτης ο οποίος πολύ ευκολά μετακινώντας τον αλλάζουμε τα Kelvin μεταξύ 3000K - 4000K και 6000K



Product Code:	Colour:	Watt:	Lumen:	CCT:	Angle:	Description:	Volt:	Lifetime:	Temperature:	RA:	LEDs:	Pack/pcs:
2-U013291	○ White	30W	2800	3000K	36°	LED COB track spot	220V-240V	30.000 hrs	-10° ~ 45°C	>80	EPISTAR	1/20
2-U013345	● Black	30W	2800	4000K 6000K	36°	2 wires adaptor CCT tunable	220V-240V	30.000 hrs	-10° ~ 45°C	>80	EPISTAR	1/20